

## Isowood*i*

### Skirting Boards & Dado Rails

#### About the brand:

Isowood is an Isolite product – Isolite is the leading expanded polystyrene (EPS) manufacturer in Africa.

Since 2010, Isolite has been reusing and recycling EPS to produce Isowood - an initiative by the Isowall Group, *to reuse and recycle*, in order to foster a sustainable future.

#### About the product:

Isowood produce extruded skirting boards and dado rails, that come in standard 3 meter lengths, for the built environment market. Isowood products have a 'wood like' appearance and pose as a viable alternative to hardwood. Isowood is manufactured to a finished shape and colour; therefore, avoiding the use of chemically based stains, paints and solvents – which are typically used to treat hardwood products.

#### Quick facts on Isowood:

- 100% recyclable both during the manufacture of, and post-consumer use – contributing to the reduction of deforestation
- Easy to install: the dado rails and skirting boards are easy to install and only need to be glued to a wall surface
- Extremely durable once installed
- Economical: inexpensive way to bring value and beauty to any room
- Proudly manufactured in RSA
- 100% waterproof
- Rot and insect resistant
- Designed to allow for electrical wiring to be placed behind the skirting boards




## Skirting Boards & Dado Rails Range

### Colour Range:

Isowood Skirting Boards and Dado Rails are manufactured in 3 different colours, namely: Meranti, Oak, and White. Isowood in Oak colour is subject to a 3000 linear metre minimum order.



### Skirting Boards:

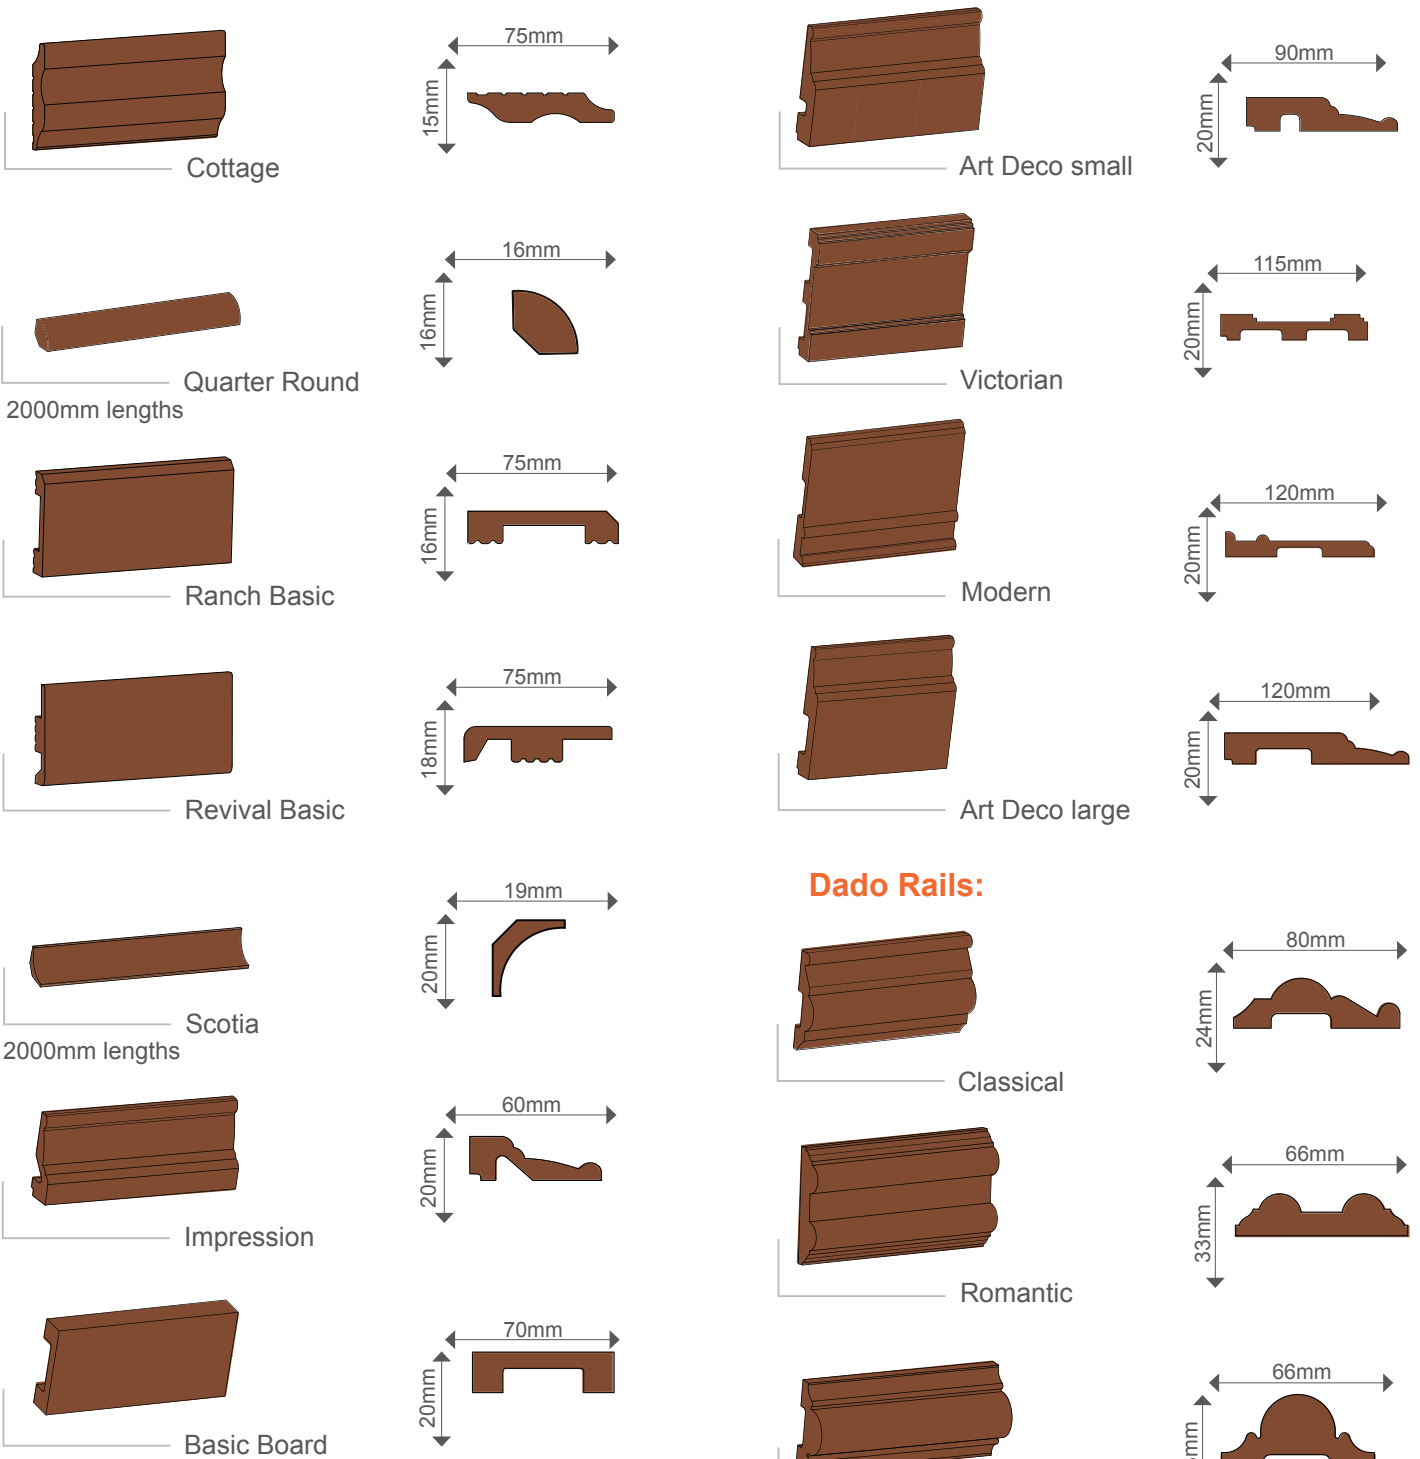

## Isowood Installation Guide

### The rights tools to start the job:


- **Isowood** product of choice
- **Isoglue**
- Tape Measure
- Mitre Box
- Pencil
- Wood Saw (fine teeth)
- Spatula or flat knife
- Chalk line
- Damp sponge or cloth

### Steps:

- Apply **Isoglue** evenly to **Isowood** product
- Press **Isowood** firmly against the wall to hold into position and to allow the excess glue to squeeze out
- Support while drying to keep in place
- Wipe excess glue off with a damp sponge or cloth
- Can be painted with either a water or solvent based paint
- Wood filler or **Isoglue** can be used to fill gaps on mitred corners
- Rough edges can be sanded down with sand paper
- Use a spirit level for dado rails


### How to position Isowood in mitre box:

- Dado Rail/Skirting Board face should be positioned towards you
- Ensure that the Dado Rail/ Skirting Board is upright and flush against the side of the mitre box

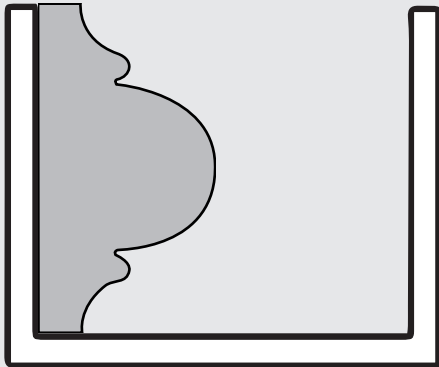


### External corners

#### A) Left Wall

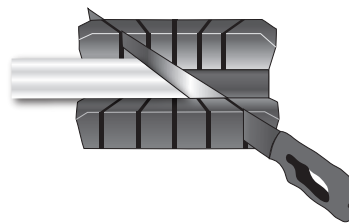


### Internal corners


#### C) Left Wall

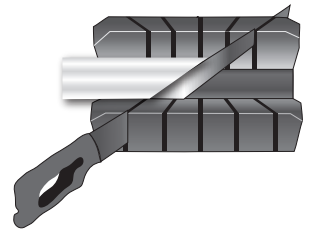

#### B) Right Wall

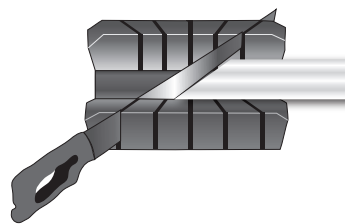

#### D) Right Wall

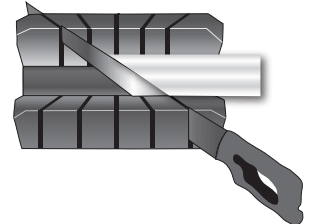

All data is based on current product line. We reserve the right to alter specifications without prior notice.

### CONTACT DETAILS:

326 Derdepoort Road, Silverton | (012) 804 3564 | [info@isowall.co.za](mailto:info@isowall.co.za) | [www.isowall.co.za](http://www.isowall.co.za)