

40x(T.O.P.)x40mm 0.5mm AZ150 flashing
 15mm Tek screw & Bonded washer with Tek screw cap
 @ 500mm crs. to panel skin
 screws must be inserted perpendicular to the panel skin
 Screw cap secured to screw head with white Sikaflex

250X150x15 0.5mm AZ150 flashing
 15mm Tek screw & Bonded washer with
 Tek screw cap @ 500mm crs. to panel skin
 screws must be inserted perpendicular to
 the panel skin and in the center of the ridge
 Screw cap secured to screw head with white Sikaflex


Butyl tape Bitumen strip

Parapet wall

Isowall DPR Roof panel

50x50x2mm Aluminium angle
 Rivets @ 400mm crs. to panel skin
 Plastic plugs @ 500mm crs. to brick wall
 Sealants=Grey or White sikaflex
 depending on brick wall colour finish.
 Face brick walls to receive no
 sealant

Existing panel wall
 (by others)

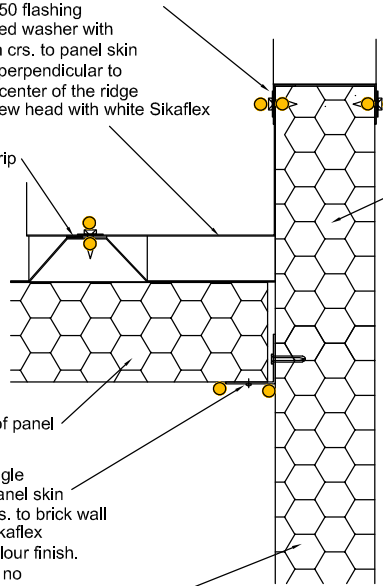

T.O.I.= THICKNESS OF INSULATION
 T.O.P.= THICKNESS OF PANEL

Sealants Colour Legend

- White silicon
- White sikaflex
- Grey Sikaflex
- Mastic
- Polar Roof